


GROUP ONE DIRECT ACTING CANTILEVER HOLELESS

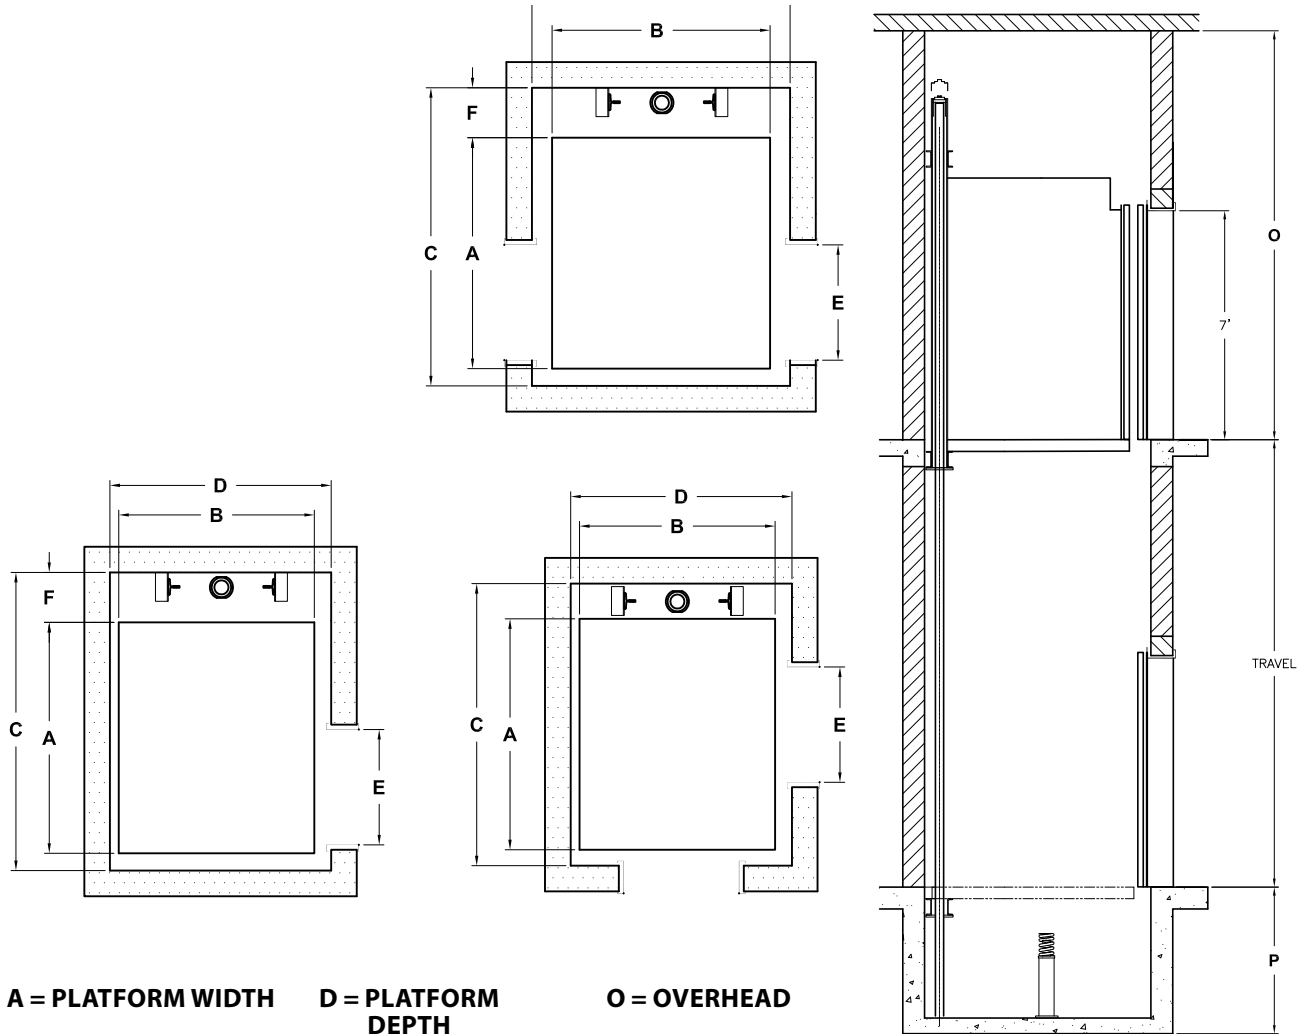

- A = PLATFORM WIDTH** **D = PLATFORM DEPTH** **O = OVERHEAD**
B = PLATFORM DEPTH **E = CLEAR DOOR OPENING** **P = PIT DEPTH**
C = HOISTWAY WIDTH **F = 20 INCHES** **[Hatched] = GOV. ACCESS DOOR**

Capacity (lbs)	Platform A x B	Hoistway C x D	Front/Rear	Clear Inside W x D	Door Type	Door Width E
2100	6'-0" x 5'-1"	7'-8" x 5'-9"	F	5'-8" x 4'-3"	1-SP	3'-0"
2100	6'-0" x 5'-8"	7'-8" x 6'-8 1/2"	F/R	5'-8" x 4'-4"	1-SP	3'-0"
2500	7'-0" x 5'-1"	8'-8" x 5'-9"	F	6'-8" x 4'-3"	1-SP	3'-6"
2500	7'-0" x 5'-8"	8'-8" x 6'-8 1/2"	F/R	6'-8" x 4'-4"	1-SP	3'-6"
3000	7'-0" x 5'-6"	8'-8" x 6'-2"	F	6'-8" x 4'-8"	1-SP	3'-6"
3000	7'-0" x 6'-1"	8'-8" x 7'-1 1/2"	F/R	6'-8" x 4'-9"	1-SP	3'-6"
3500	7'-0" x 6'-2"	8'-8" x 6'-10"	F	6'-8" x 5'-4"	1-SP	3'-6"
3500	7'-0" x 6'-9"	8'-8" x 7'-9 1/2"	F/R	6'-8" x 5'-5"	1-SP	3'-6"
4500H	6'-0" x 9'-2"	7'-8" x 10'-0"	F	5'-8" x 8'-2 1/2"	2-SP	4'-0"
4500H	6'-0" x 9'-10 1/2"	7'-8" x 11'-2"	F/R	5'-8" x 8'-3 1/2"	2-SP	4'-0"

EECO's Direct Acting Cantilever Holeless Group One elevator can solve space limitation problems.

As always, EECO only uses the highest quality, industry standard parts for reliability and easy availability.

This holeless design eliminates the cost of drilling.

Verify all dimensions with EECO prior to construction. Consult EECO Engineering for required overhead and pit depth dimensions.